


FTP PATCH CORDS

CATEGORY 5E FTP PATCH CORDS

Canovate CAT 5e FTP LAN Data Cable Patch Cord is an enhanced performance patchcord used for transmission of high speed data, digital and analogue voice and video RGB signals on LANs. It supports Gigabit Ethernet (1000 BASE-T) standard and operates at bandwidths up to 100 MHZ.

Highlights

- 2x Cat.5e RJ45 plug
- Foil shielded
- TIA/EIA 568B coded
- 24 or 26 AWG stranded cables

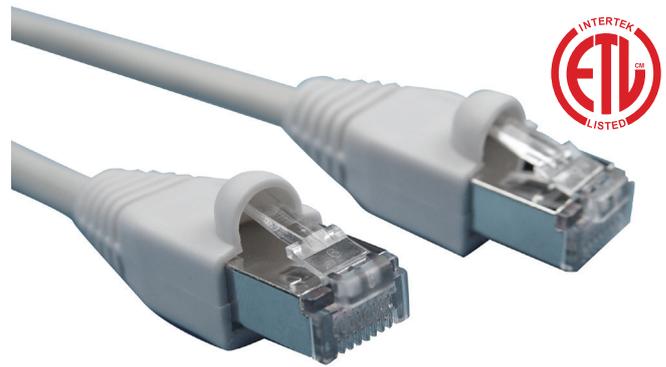

Applications

- 100 Base-TX
- 100 Base-T
- 100VG-Any LAN
- 1000 Base-T(Gigabit Ethernet)
- 1000 Base-TX

Construction

Insulation	HDPE
Stranding	4 twisted pairs
Pair shielding	LSZH FR (Flame Retardant) or PVC
Installation Temperature	-30° ~ +60°

Part No	Type
KF0-L-PC0x-C5e-R45-y	x meter Cat.5e FTP LSZH Patch Cord, y
KF0-P-PC0x-C5e-R45-y	x meter Cat.5e FTP PVC Patch Cord, y



X : Available lengths in meter 1,2,3,5 and 10
 Y : Available colors
 (0: White, 1:Grey, 2:Black, 3:Red, 4:Green, 5:Blue, 6:Yellow, 7:Orange)



Patch Cord Drawing

Pin Assignment:

Pos. No.	T568B WIRING 568	Pos. No.
1	Orange	1
2	White Orange	2
3	Green	3
6	White Green	6
4	Blue	4
5	White Blue	5
7	Brown	7
8	White Brown	8

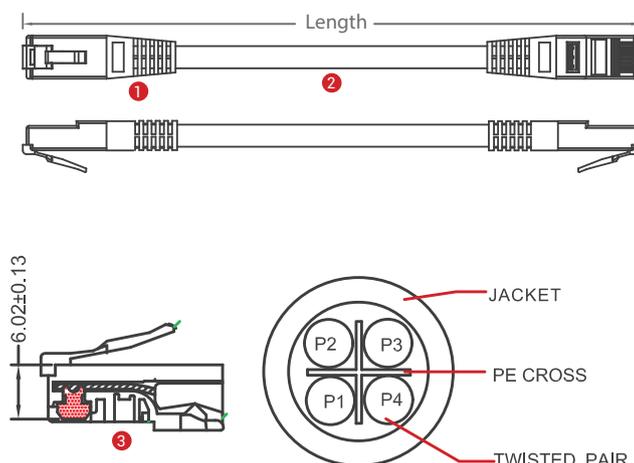

P1	Blue White Blue	1	Plug
P2	Orange White Orange	2	Cable Length
P3	Green White Green	3	Cable Boot
P4	Brown White Brown		